
VHF Fiberglass Omni Antenna

CK-BF150VHF

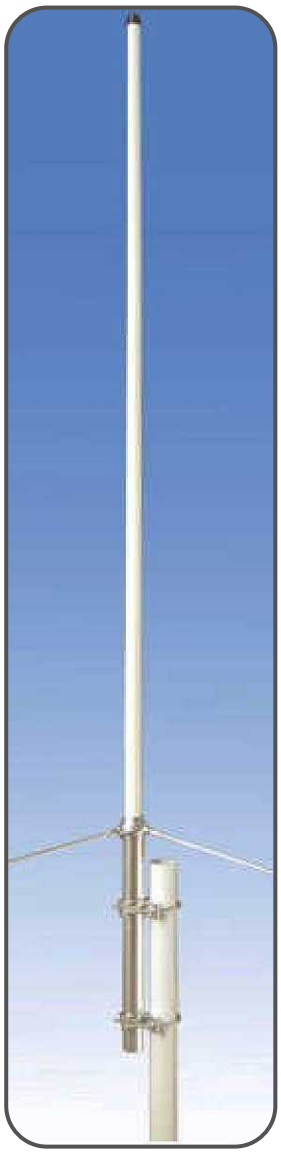

Electrical specifications

Frequency Range(MHz)	136-174
Bandwidth(MHz)	10
Polarization	Vertical
Impedance	50 Ohm
Gain (dBi)	6.5
VSWR	≤1.5:1
Maximum input power (W)	200
Type	omnidirectional 1/2λ

Mechanical specifications

Connector	UHF Female (SO-239)
Connector position	Bottom
Length	2500± 20 mm
Packing weight (kg)	800g
Radiating Material	Cu
Radome Material	Fiberglass
Rated wind velocity	60m/sec
Operating temperature℃	-50～70
Material of Hardware-supplied	Metals
Mast diameter accepted	30-62φ



Incluye radios de planos y abrazaderas.